



Profiled JIB CRANE: Column application with Metal Profile Track

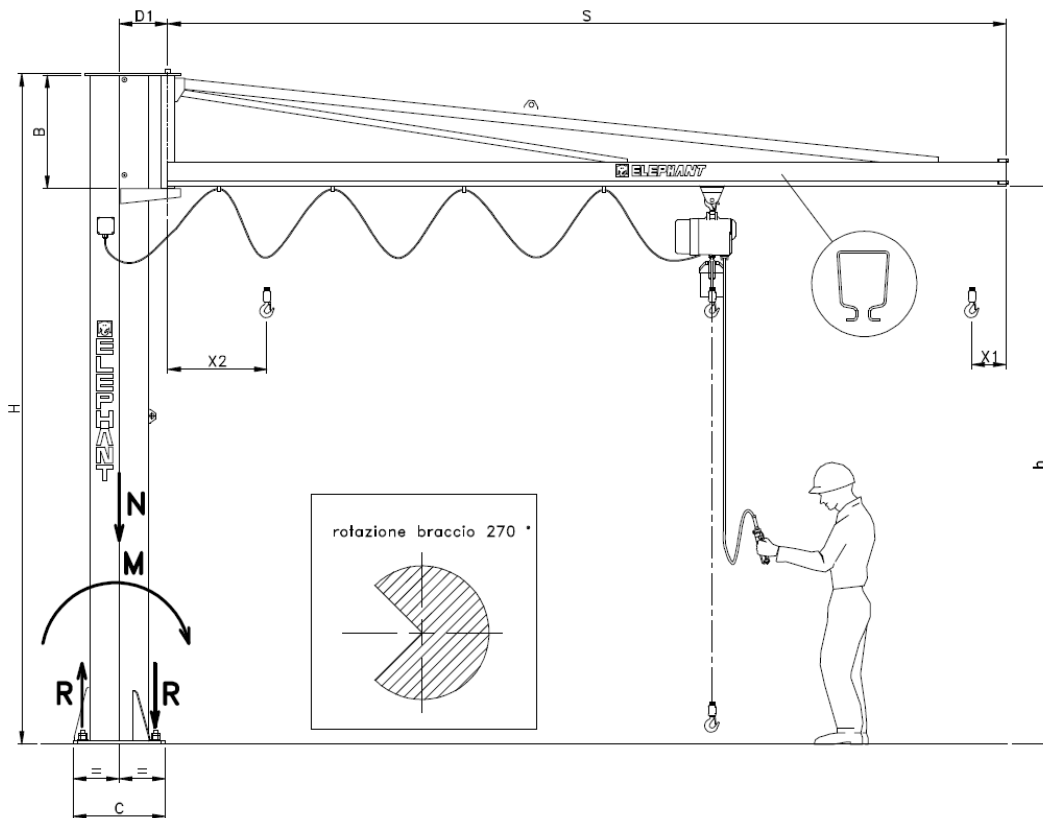

Model	Cap.ty Kg	S m	H mm	h mm	D1 mm	B mm	X2 mm	X1 mm	C mm
A-125/3	125	3	3.000	2.660	200	347	590	92	400
A-125/4	125	4	3.000	2.660	200	347	640	92	400
A-125/5	125	5	3.500	2.980	215	527	725	92	400
A-126/6	125	6	3.500	2.980	215	527	845	92	400
A-125/7	125	7	3.500	2.830	290	677	895	92	550
A-125/8	125	8	4.000	3.330	290	677	970	115	550
B-250/3	250	3	3.000	2.480	215	527	595	92	400
B-250/4	250	4	3.000	2.480	215	527	645	92	400
B-250/5	250	5	3.500	2.830	290	677	725	92	550
B-250/6	250	6	3.500	2.830	290	677	870	115	550
B-250/7	250	7	3.500	2.830	290	677	930	115	550
B-250/8	250	8	4.000	3.100	345	907	1.000	140	700
C-500/3	500	3	3.500	2.830	290	677	620	115	500
C-500/4	500	4	3.500	2.830	290	677	670	115	500
C-500/5	500	5	3.500	2.830	290	677	760	115	500
C-500/6	500	6	4.000	3.100	345	907	880	115	700
C-500/7	500	7	4.000	3.100	370	907	930	115	700
C-500/8	500	8	4.000	3.100	370	907	1.000	140	700
D-1000/3	1000	3	3.500	2.830	290	677	655	140	550
D-1000/4	1000	4	4.000	3.100	345	907	700	140	700
D-1000/5	1000	5	4.000	3.100	370	907	785	140	700
D-1000/6	1000	6	4.000	3.100	440	907	915	140	800
D-1000/7	1000	7	4.000	3.100	440	907	965	140	800
D-1000/8	1000	8	4.000	3.100	440	907	1.000	140	800

Profiled JIB CRANE: shelf application with Metal Profile Track

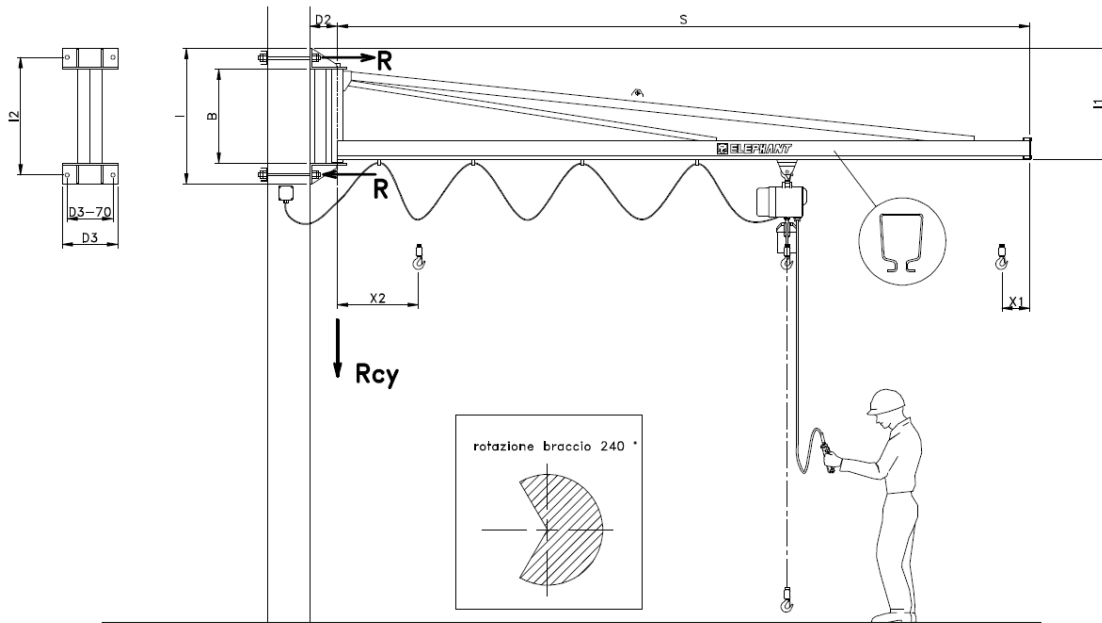

Model	Cap.ty Kg	S m	D1 mm	B mm	X2 mm	X1 mm	I mm	D2 mm	I1 mm	D3 mm	I2 mm
E-125/3	125	3	200	347	590	92	647	205	482	400	507
E-125/4	125	4	200	347	640	92	647	205	482	400	507
E-125/5	125	5	215	527	725	92	827	205	662	400	692
E-126/6	125	6	215	527	845	92	827	205	662	400	692
E-125/7	125	7	290	677	895	92	977	200	812	400	842
E-125/8	125	8	290	677	970	115	977	200	812	400	842
F-250/3	250	3	215	527	595	92	827	205	662	400	692
F-250/4	250	4	215	527	645	92	827	205	662	400	692
F-250/5	250	5	290	677	725	92	977	200	812	400	842
F-250/6	250	6	290	677	870	115	977	200	812	400	842
F-250/7	250	7	290	677	930	115	977	195	812	400	842
F-250/8	250	8	345	907	1.000	140	1.207	170	1.042	450	1.075
G-500/3	500	3	290	677	620	115	977	200	812	400	842
G-500/4	500	4	290	677	670	115	977	200	812	400	842
G-500/5	500	5	290	677	760	115	977	195	812	400	842
G-500/6	500	6	345	907	880	115	1.207	170	1.042	450	1.075
G-500/7	500	7	370	907	930	115	1.207	170	1.042	450	1.075
G-500/8	500	8	370	907	1.000	140	1.207	170	1.042	450	1.075
H-1000/3	1000	3	290	677	655	140	977	195	812	450	845
H-1000/4	1000	4	345	907	700	140	1.207	170	1.042	450	1.075
H-1000/5	1000	5	370	907	785	140	1.207	170	1.042	450	1.075
H-1000/6	1000	6	440	907	915	140	1.207	170	1.042	450	1.075
H-1000/7	1000	7	440	907	965	140	1.207	170	1.042	450	1.075
H-1000/8	1000	8	440	907	1.000	140	1.207	170	1.042	450	1.075

Note: we reserve the right to modify the constructive features without pre-
notification